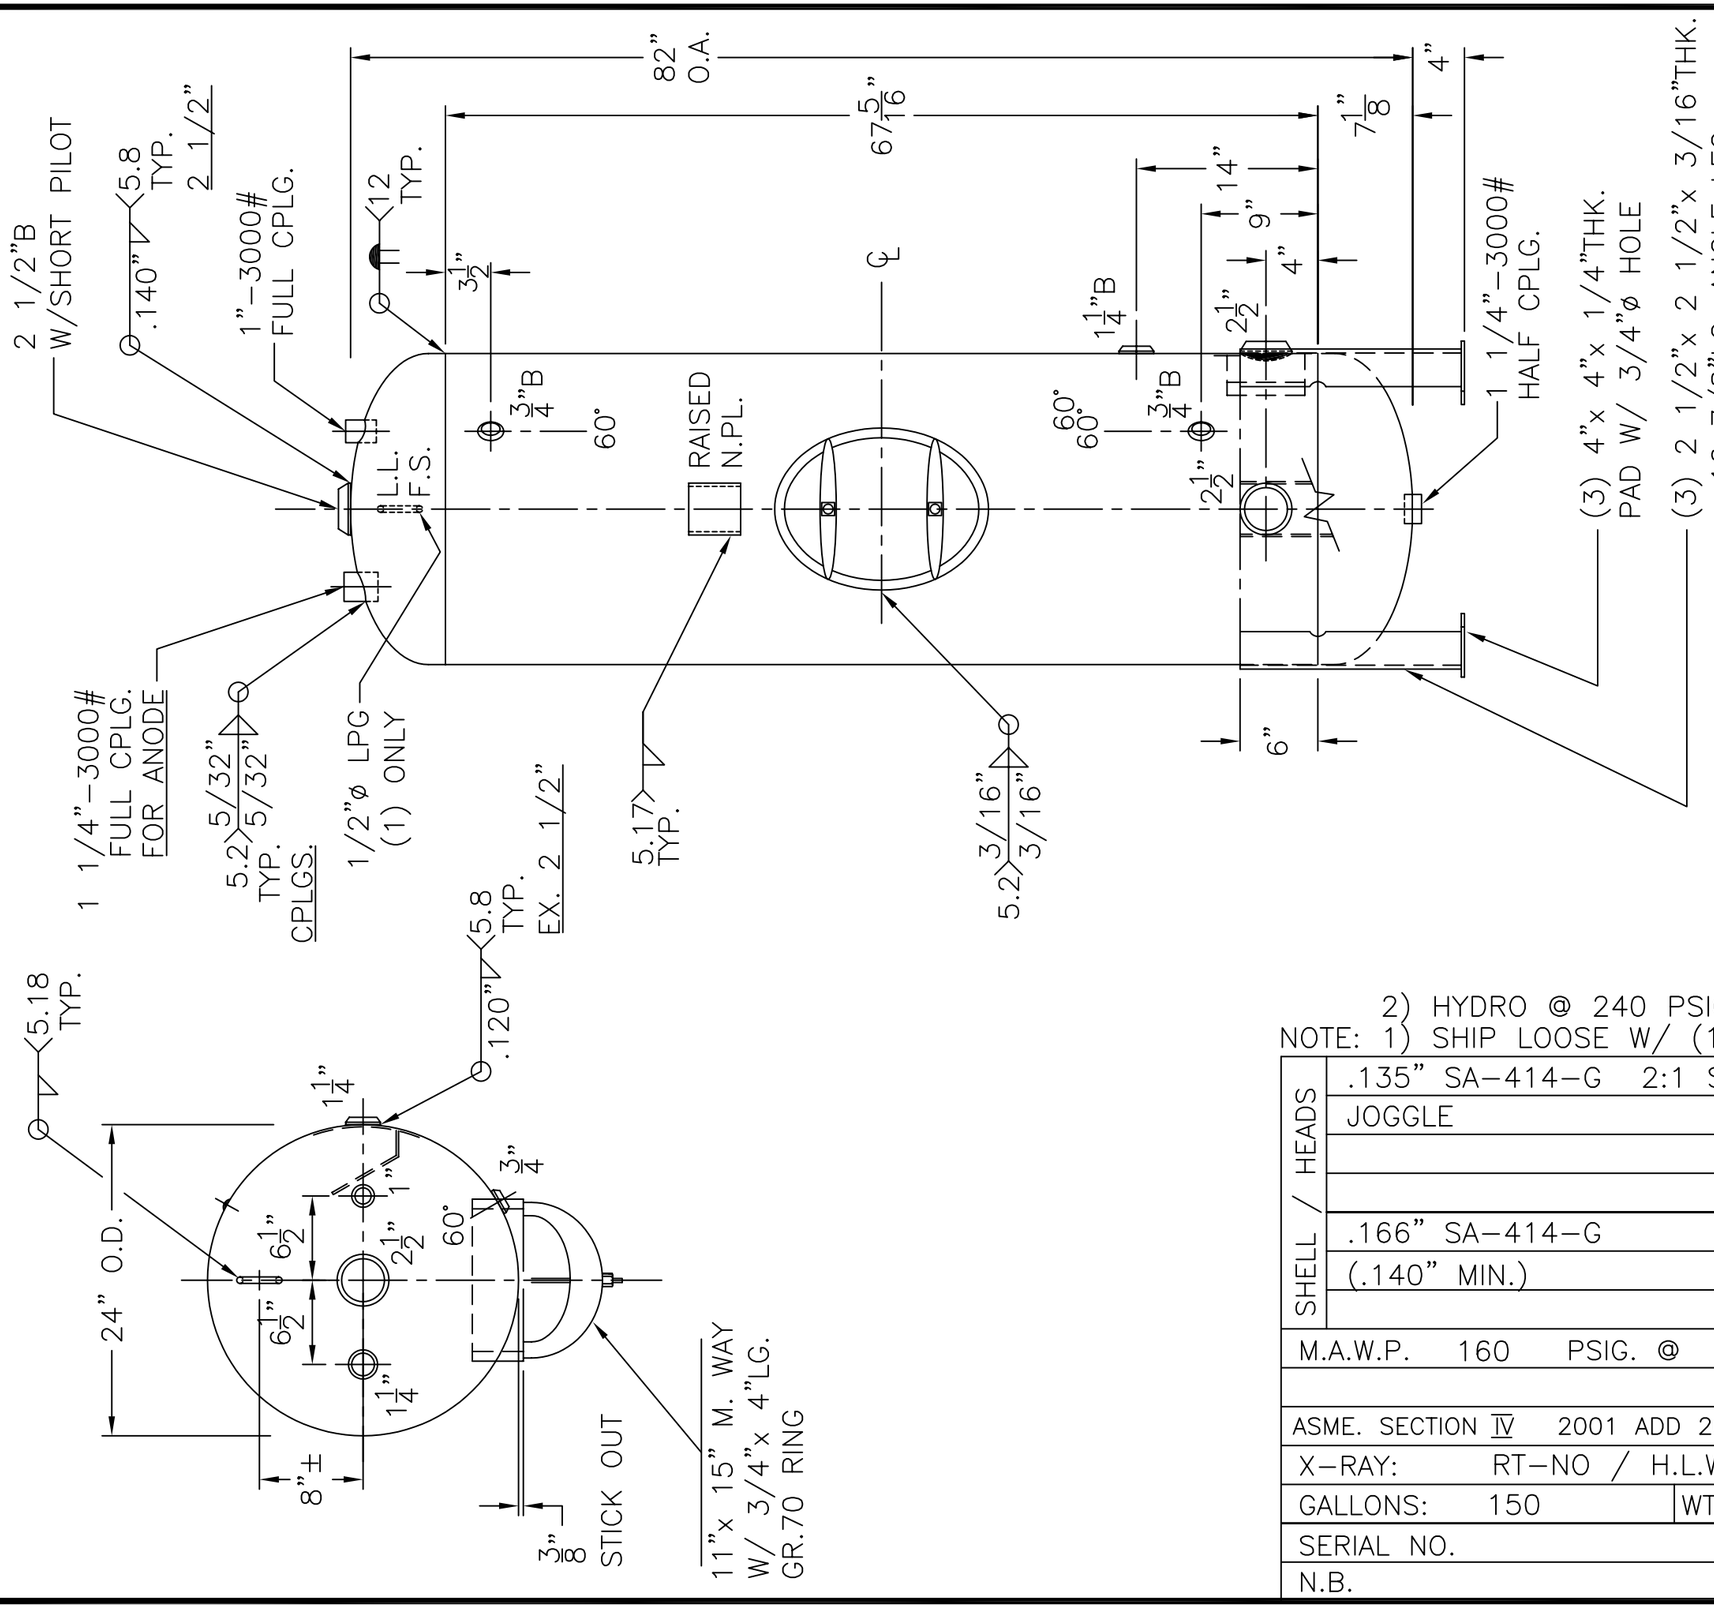


2) HYDRO @ 240 PSIG. MIN.

NOTE: 1) SHIP LOOSE W/ (1) 1 5/16"x 48"LG. FLEX. MAG. ANODE.

| | | | |
|---|---|---|---|
| SHELL / HEADS | .135" SA–414–G 2:1 S.E. | GS–24–150–V | REV. 10–5–04 |
| | JOGGLE | | DATE: 5–6–03 |
| | | FOR: HANSON STANDARD | |
| | | VERT. HOT WATER TANK | |
| | .166" SA–414–G | | |
| | (.140" MIN.) | SURFACE AREA = 45.4 SQ. FT. | |
| | | INSIDE: GLASS LINED | |
| M.A.W.P. 160 PSIG. @ 210 °F | | OUTSIDE: PRIME | |
| | | LEG–ZONE 4–15 KM. | |
| ASME. SECTION Ⅳ 2001 ADD 2003 | | CAD–"B" UNDER "STD"–SERIES | |
| X–RAY: RT–NO / H.L.W. | | BY: J.G. | SCALE: 1"=12" |
| GALLONS: 150 | WT. 413 LBS. | ROY E. HANSON JR. MFG. | |
| SERIAL NO. | | 1924 COMPTON AVE. | |
| N.B. | | LOS ANGELES, CA 90011 | |